


ORDERING INFORMATION:
 #WPA40-{STROKE}-{COUPLER}-{LOCK OPTION}
 75mm
 RAP or RIGID
 LOCK

- OPTIONS NOTES:**
- 1) LOCKING UNIT COMES STANDARD WITH WELKER 63mm BORE AIR CYLINDER.
 - 2) COUPLER OPTION: RAP COUPLING CAUSES THE UNIT STROKE TO BE 2mm [.08"] LESS THAN THE NOMINAL STROKE OF THE CYLINDER. UNLESS OTHERWISE SPECIFIED, THE PNEUMATIC CYLINDER COMES STANDARD WITH THE RAP COUPLING.
 - 3) UNITS COME STANDARD WITH A SHROUD AS SHOWN. TO ORDER THE UNIT WITHOUT A SHROUD, ADD SUFFIX "-NS" TO THE END OF THE PART NUMBER.

PART NUMBER EXAMPLES:
 TO ORDER UNIT AS SHOWN WITH 25mm STROKE & RIGID COUPLING, ORDER AS:
 #WPA40-75-RIGID-LOCK
 TO ORDER UNIT AS SHOWN WITH A RAP COUPLING & NO SHROUD, ORDER AS:
 #WPA40-73-LOCK-NS

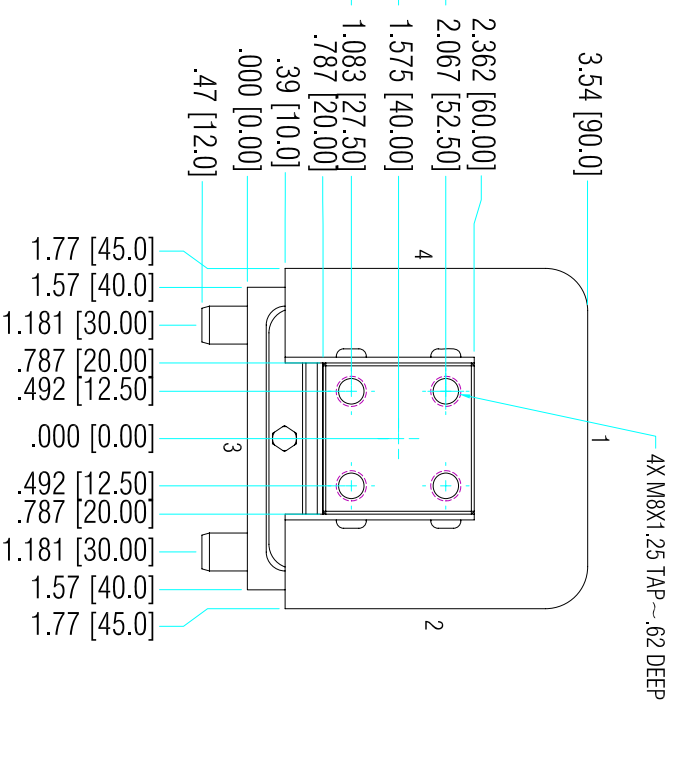

UNIT WEIGHT 29 LBS.

DATE		10/16/2002	
STATUS		Released	
DRAWN BY		JMP	
CHECK BY		RCA	
DATE		10/12/2001	
SCALE		HALL	
WELKER BEARING COMPANY			
TEMPLATE			
WPA40 SHOT PIN - 75mm STROKE WITH LOCKING CYLINDER			
DATE		10/12/2001	
STATUS		Released	
DRAWN BY		JMP	
CHECK BY		RCA	
DATE		10/12/2001	
SCALE		HALL	
WPA40L12.DWG			