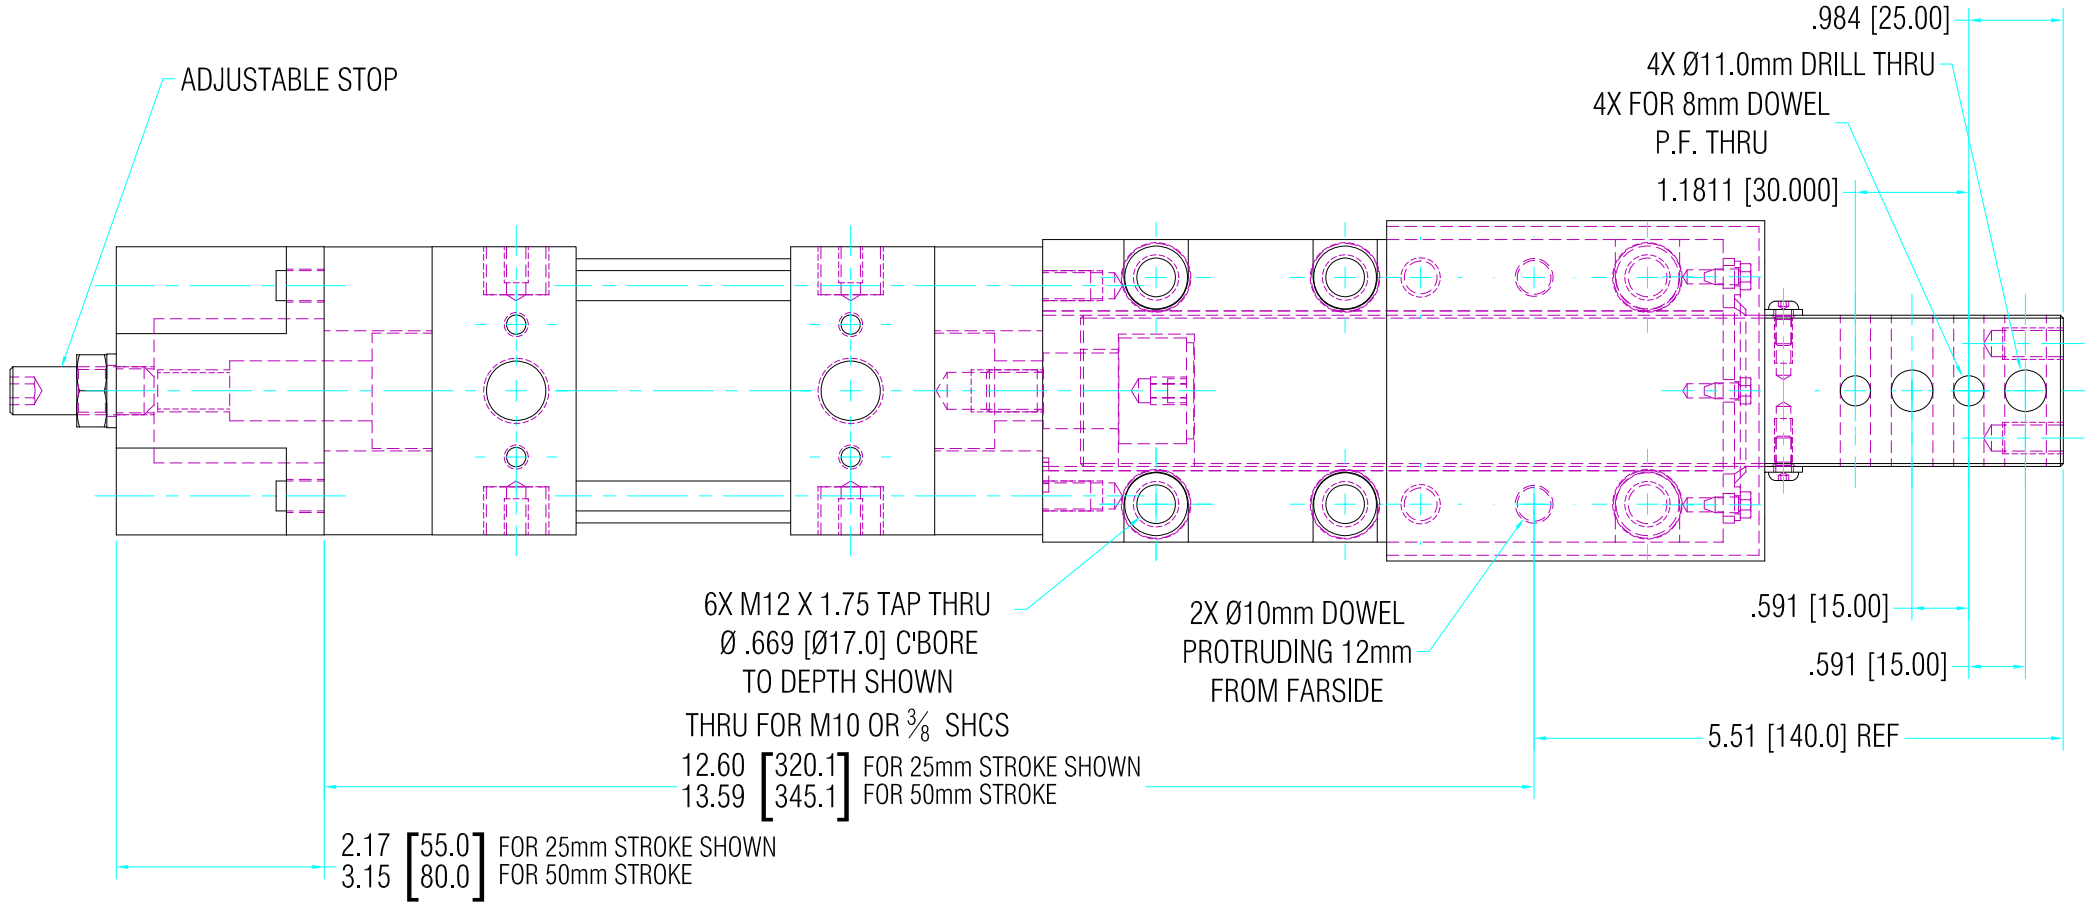

ORDERING INFORMATION:

#WPA40-{STROKE}-{HYD CYL OPT}-{COUPLER}-{DIRECTION OF STOP}

- 25-50mm
- "H"
- RAP or RIGID
- RET

OPTIONS NOTES:

1) HYDRAULIC CYLINDER OPTION: UNIT COMES STANDARD WITH 63mm BORE PNEUMATIC CYLINDER. FOR 40mm BORE HYDRAULIC CYLINDER, ADD "-H" TO PART #.
2) COUPLER OPTION: RAP COUPLING CAUSES THE UNIT STROKE TO BE 2mm[.08"] LESS THAN THE NOMINAL STROKE OF THE CYLINDER. UNLESS OTHERWISE SPECIFIED, THE PNEUMATIC CYLINDER COMES STANDARD WITH THE RAP COUPLING.
3) DIRECTION OF STOP OPTION: SPECIFY THE DIRECTION FOR THE ADJUSTABLE STOP. UNIT CAN STOP IN THE EXTEND, "-EXT", OR THE RETRACT, "-RET", DIRECTION OF STROKE. FOR DIMENSIONAL INFORMATION ON "-EXT" OPTION, SEE EXTEND STOP TEMPLATE.
4) UNITS COME STANDARD WITH A SHROUD AS SHOWN. TO ORDER THE UNIT WITHOUT A SHROUD, ADD SUFFIX "-NS" TO THE END OF THE PART NUMBER.

PART NUMBER EXAMPLES:

TO ORDER UNIT AS SHOWN WITH 25mm STROKE, RIGID COUPLING, & EXTEND STOP, ORDER AS:
#WPA40-25-RIGID-RET

TO ORDER UNIT AS SHOWN WITH A RAP COUPLING & NO SHROUD, ORDER AS:
#WPA40-23-NS-RET

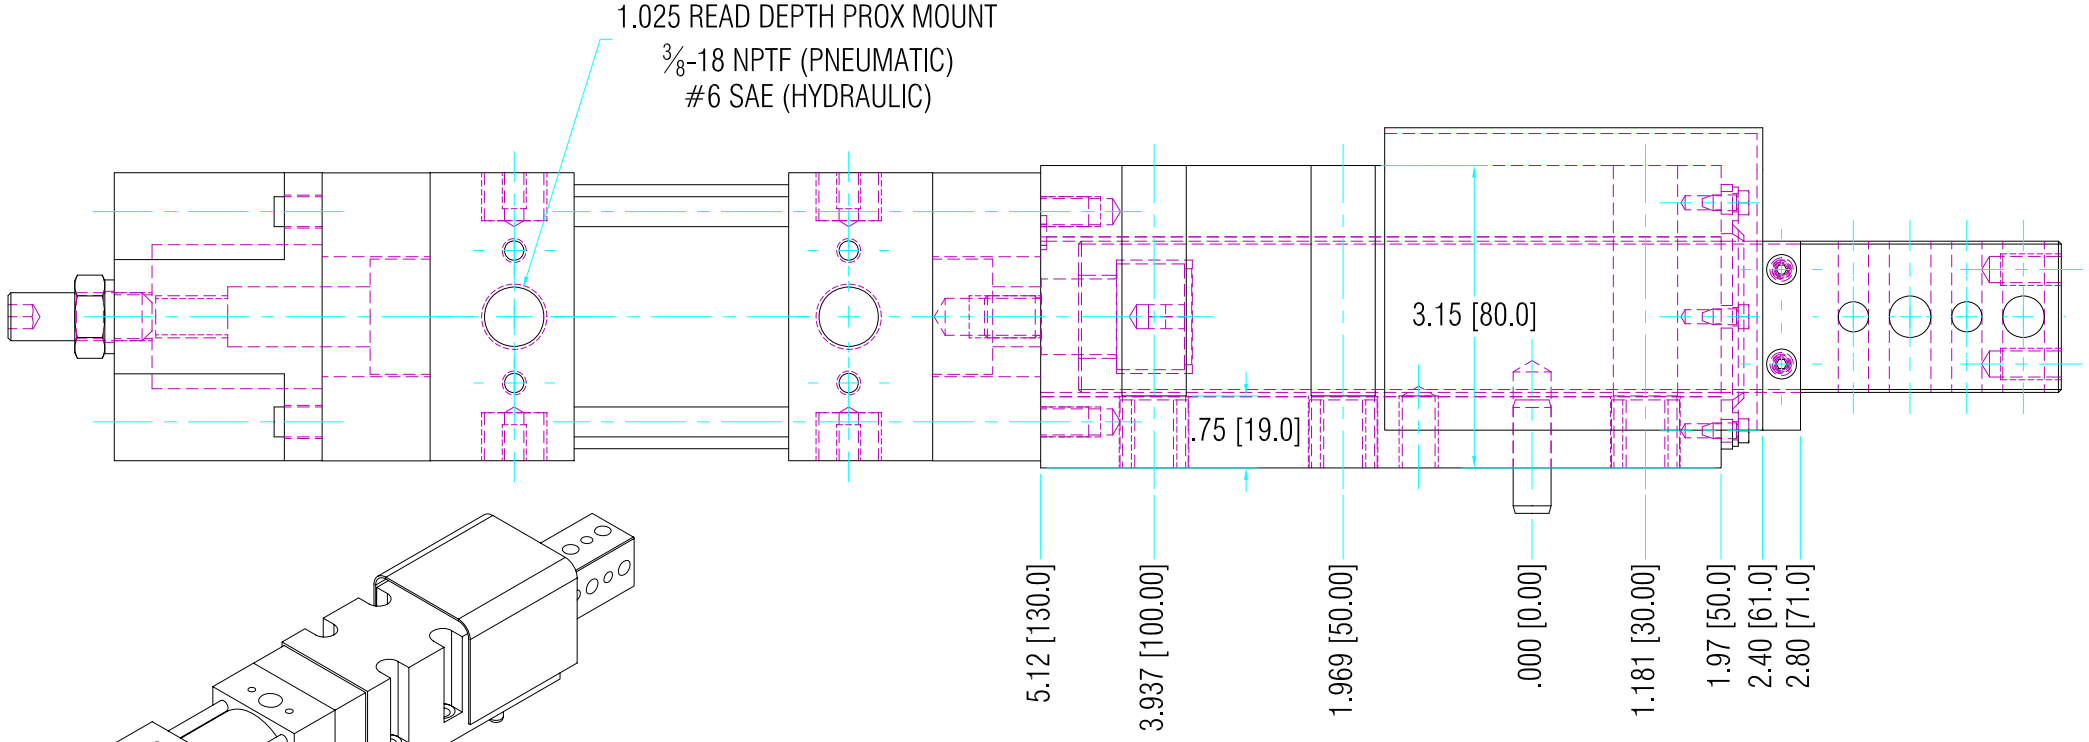

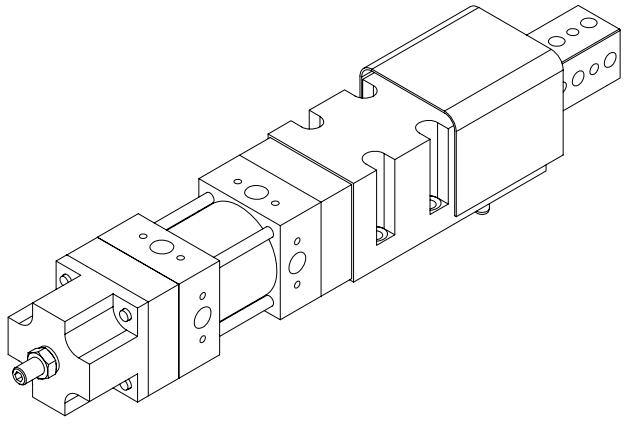

RETRACT STOP TEMPLATE ONLY

UNIT WEIGHT 18 LBS.

WELKER BEARING COMPANY

TOOL NAME	WPA40 W/ SHORT STROKE OPTION
	TEMPLATE
DRAWN BY: DJH	DATE: 2/6/2003
CHKD. BY: RCA	ENG. APPROVAL
SCALE: 1/2	FILE NAME: WPA40L21.DWG

Date	Status
9/12/2005	Released