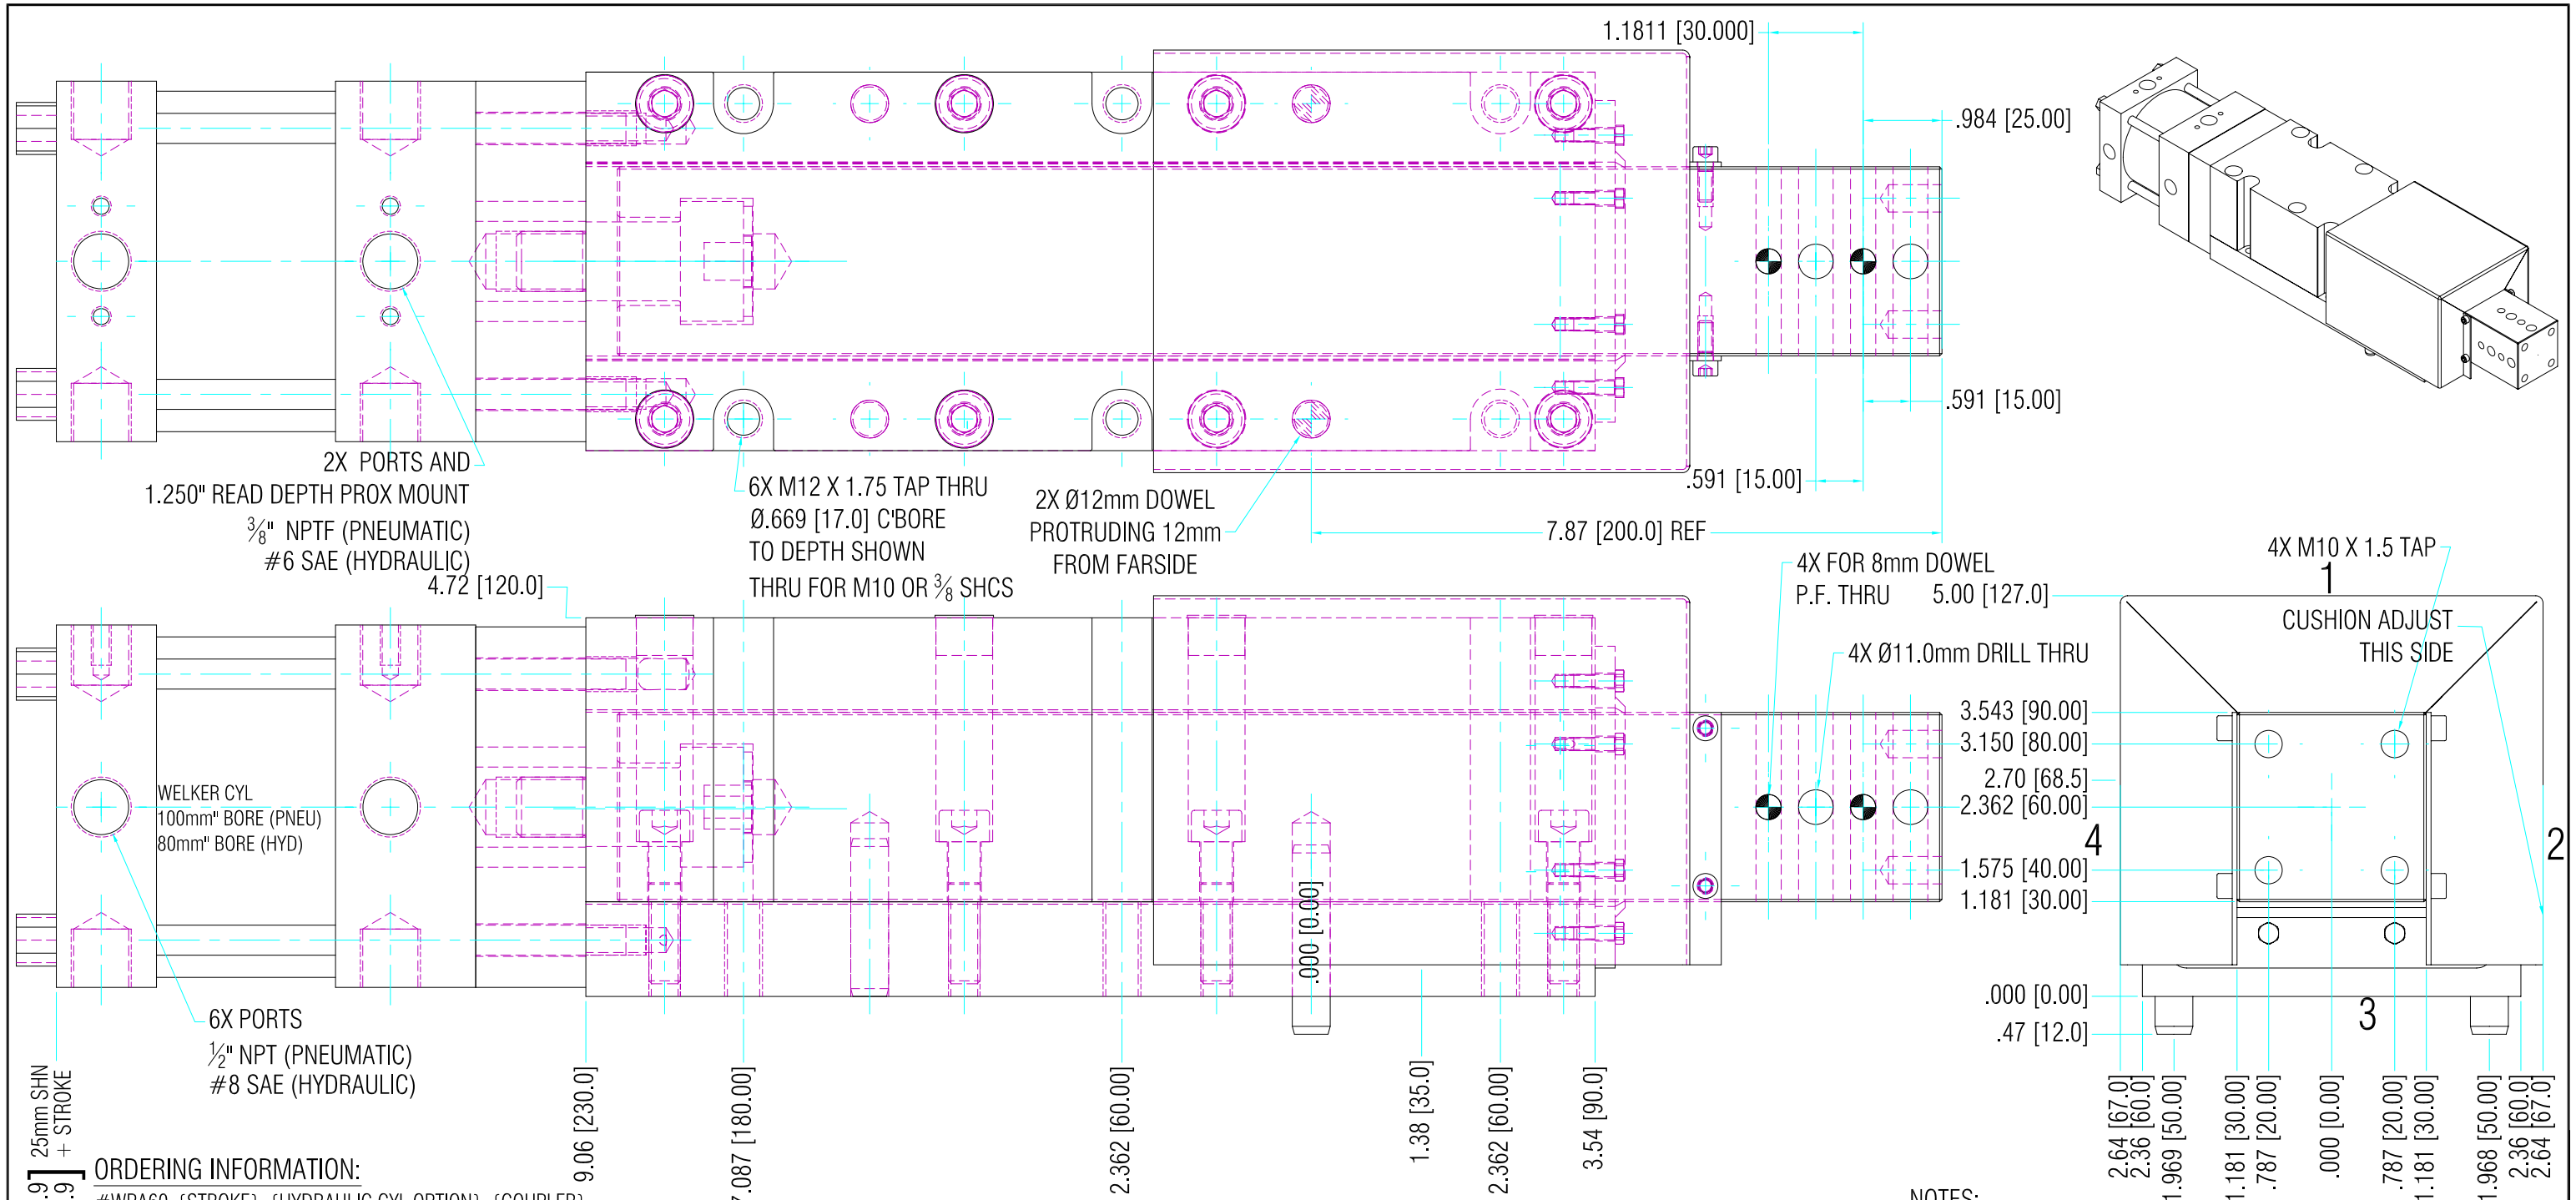

ORDERING INFORMATION:

#WPA60-{STROKE}-{HYDRAULIC CYL OPTION}-{COUPLER}

- STROKE: 25-100mm
- HYDRAULIC CYL OPTION: H
- COUPLER: RAP or RIGID

OPTIONS NOTES:

1) CYL OPTION: WPA60 COMES STANDARD WITH WELKER 100mm BORE AIR CYLINDER, UNLESS HYDRAULIC OPTION, "-H", IS SPECIFIED. HYDRAULIC CYLINDER IS A WELKER 80mm BORE AND IS ½" LONGER THAN PNEUMATIC CYLINDER SHOWN.

2) COUPLER OPTION: RAP COUPLING CAUSES THE UNIT STROKE TO BE 3mm[.12"] LESS THAN THE NOMINAL STROKE OF THE CYLINDER. UNLESS OTHERWISE SPECIFIED, THE PNEUMATIC CYLINDER COMES STANDARD WITH THE RAP COUPLING AND THE HYDRAULIC CYLINDER COMES STANDARD WITH THE RIGID COUPLING.

3) UNITS COME STANDARD WITH A SHROUD AS SHOWN. TO ORDER THE UNIT WITHOUT A SHROUD, ADD SUFFIX "-NS" TO THE END OF THE PART NUMBER.

PART NUMBER EXAMPLES:

TO ORDER UNIT AS SHOWN WITH 25mm STROKE & RIGID COUPLING, ORDER AS:
#WPA60-25-RIGID

TO ORDER UNIT AS SHOWN WITH A RAP COUPLING & NO SHROUD, ORDER AS:
#WPA60-22-NS

TO ORDER UNIT AS SHOWN WITH HYDRAULIC CYLINDER & RIGID COUPLER:
#WPA60-25-H

TO ORDER UNIT AS SHOWN WITH HYDRAULIC CYLINDER, RAP COUPLER AND NO SHROUD:
#WPA60-22-H-RAP-NS

NOTES:

1.025 READ DEPTH PROX PORTS AT POSITION 1.
THE CYLINDER CAN BE FIELD ROTATED TO PLACE THE PROX MOUNT AT ANY LOCATION.

UNIT WGT 71 LBS

WELKER BEARING COMPANY

TOOL NAME: WPA60 SERIES SHOTPIN ~ 25/100 STROKES

TEMPLATE

Date	Status
5/13/2005	Released

DRAWN BY	DATE	CHKD. BY	ENG. APPROVAL
DJH	9/4/2001	RCA	

SCALE 1/4 — FILE NAME WPA60L01.DWG