


30.82 [782.9] FOR 200MM STK SHN  
 30.82 [782.9] FOR 175MM STK

6X 1/2" NPT PORTS

1.18 [30.0]

2X 12.0mm DOWELS  
 PROTRUDING 12.7mm[]

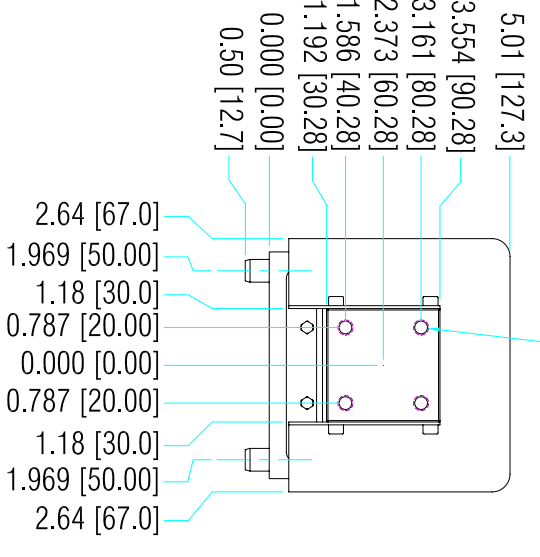

ORDERING INFORMATION:

- 172mm STROKE: #WPA60-172
  - 175mm STROKE: #WPA60-175-RIGID
  - 197mm STROKE: #WPA60-197
  - 200mm STROKE: #WPA60-200-RIGID
- UNIT COMES STANDARD WITH RAP COUPLING. THE RAP COUPLING CAUSES THE STROKE TO BE .12" [3mm] LESS THAN THE NOMINAL STROKE OF THE CYLINDER. FOR HYDRAULIC CYLINDERS, ADD SUFFIX "-H"; HYDRAULIC UNITS COME STANDARD WITH RIGID COUPLINGS. FOR RAP COUPLINGS, ADD SUFFIX "-RAP".
- 172mm STROKE: #WPA60-172-RAP-H
  - 175mm STROKE: #WPA60-175-H
  - 197mm STROKE: #WPA60-197-RAP-H
  - 200mm STROKE: #WPA60-200-H

Rev	Date	Status	Description
3	7/9/2002	Released	END-HOLE DELETED

**DO NOT SCALE DRAWING**

EXCEPT AS NOTED  
 DECIMAL TOL. SHALL BE  
 2 PLACE ±.010  
 3 PLACE ±.005  
 4 PLACE ±.0005  
 ALL DOWEL LOCATIONS ±.0005  
 BETWEEN HOLES

**WEYER**  
 BEARING COMPANY

TOOL MAKE  
 WPA60 SERIES SHOTPIN - 175/200 STROKES  
 DRAWN BY DATE  
 DLH 12/2001  
 CHECKED BY  
 RCA  
 FILE NAME  
 WPA60L03.DWG

SCALE 1/4